



N/PE 2-electrode Gas discharge tube

BF

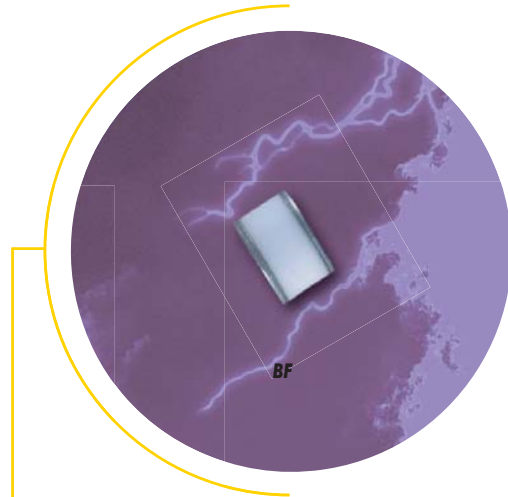

Dimensions (in mm)

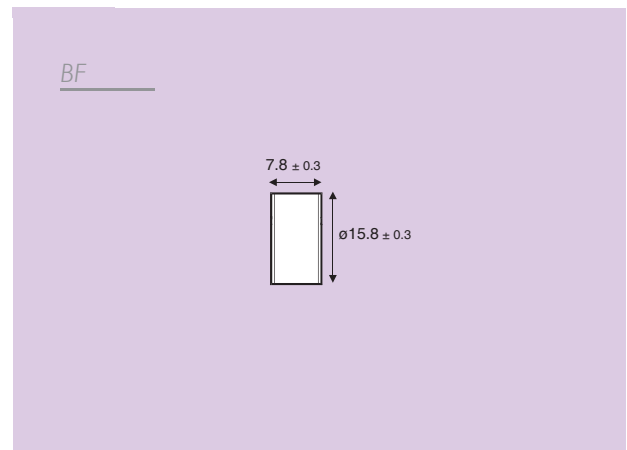

Characteristics

CITEL part number	BF-800
DC sparkover voltage (100V/s)	650-1000 V
Impulse sparkover voltage (onde 1.2/50µs - 6 kV)	< 1500 V
Tension extinction alternative sous 100 A	> 255 Vac
Insulation resistance (at 100Vdc)	> 1GΩ
Nominal discharge current (I _n) (test 8/20µs suivant NF EN 616473-11)	30 kA
Max. discharge current (I _{max}) (test 8/20µs suivant NF EN 616473-11)	70 kA
Courant de choc (I _{imp}) (test 10/350µs suivant NF EN 616473-11)	> 25 kA