





CITEL

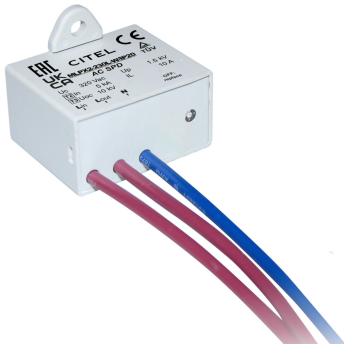

Ultra Compact Type 2+3 hard wired surge protector for class II

MLPX2-230L-W/IP20

- ▶ Ultra compact Type 2+3 hard wired surge protectors
- ▶ Wall mounting and hard wired connection
- ▶ Bracket breakable
- ▶ Protection rating : IP20
- ▶ Disconnection signaling by indicator
- ▶ AC disconnection in case of end of life
- ▶ EN 61643-11, IEC 61643-11 and UL1449 4ed. compliance

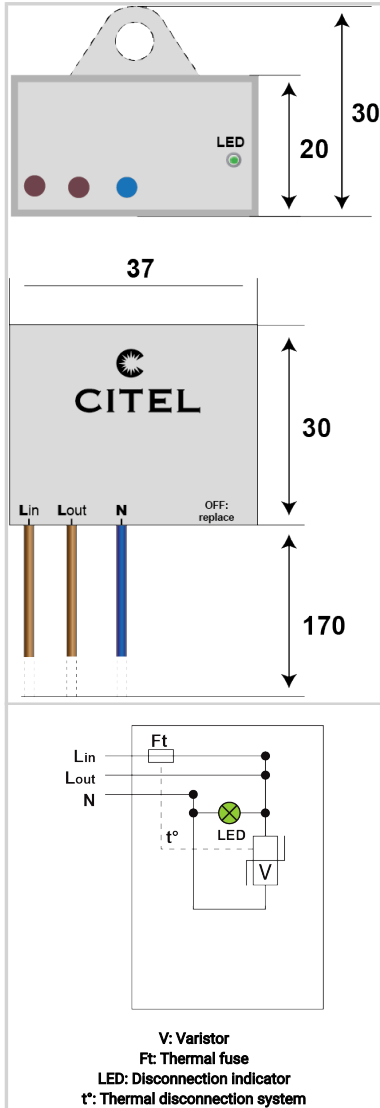

Electrical Characteristics		
SPD type	IEC	2+3
Network		220-240 V Single-phase
AC system		TT-TN
Nominal line voltage	U _n	230 V
Max. AC operating voltage	U _c	320 Vac
Max. load current @25°C	I _L	10 A
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	440 Vac disconnection
Temporary Over Voltage N/PE (TOV HT) Without disconnection or with safety disconnection	UT	1200 V/300A/200 ms disconnection
Residual Current Leakage current to Ground	I _{pe}	None
Nominal discharge current 15 x 8/20 μs impulses	I _n	5 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I _{max}	10 kA
Total Maximum discharge current max. total withstand @ 8/20 μs	I _{max} Total	20 kA
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50μs - 8/20μs	U _{oc}	10 kV
Withstand on overvoltages IEEE C62.41.1		10 kV / 10 kA
Protection mode(s)		Differential Mode
Protection level L/N @ I _n (8/20μs)	U _p L/N	1.5 kV
Protection level CM/DM @ I _n (8/20μs)	U _p mc /md	1.5 kV
Admissible short-circuit current	I _{scrr}	10 000 A
Mechanical Characteristics		
Technology		MOV+GDT
Connection to Network		By wires: 1.5mm ² (L/N) and 2.5mm ² (PE)
Mounting		Wall or plate
Housing material		Thermoplastic UL94 V-0
Operating temperature	T _u	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection and AC line cut-off
Disconnection indicator		LED green OFF and AC network cut-off
Operating indicator		Green Led ON
Dimensions		See diagram
Weight		0.031 kg
Disconnectors		
Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Standards		
Standards compliance		IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Part number		
711218		

