





CITEL

Type 2 AC surge protector - 3-phase+N

DS44S-400

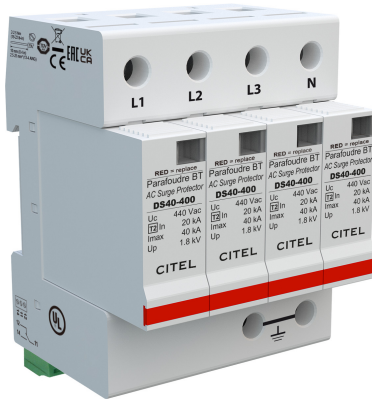

- Discover our latest innovation : the [DAC50S-40-440](#)
- Type 2 AC Multipolar surge protector
- In 20 kA
- I_{max} total: 160 kA
- Pluggable module for each phase
- Remote signaling option
- EN 61643-11, IEC 61643-11, UL1449 ed.5

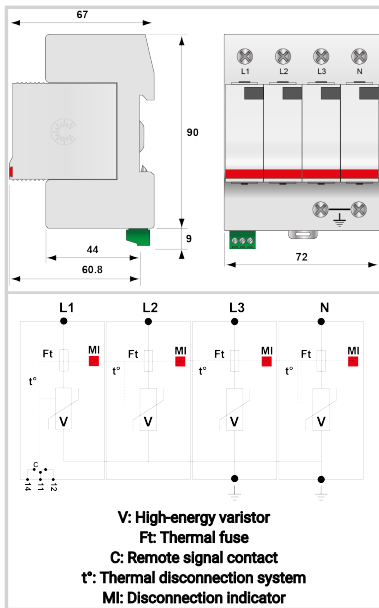

Electrical Characteristics

Network		230/400 V
AC system		IT
Nominal line voltage	U _n	230/400 Vac
Max. AC operating voltage	U _c	440 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. <i>Without disconnection</i>	UT	580 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn <i>Without disconnection or with safety disconnection</i>	UT	770 Vac disconnection
Residual Current		
Leakage current to Ground	I _{pe}	< 2 mA
Follow current	I _f	None
Nominal discharge current <i>15 x 8/20 μs impulses</i>	I _n	20 kA
Max. discharge current <i>max. withstand @ 8/20 μs by pole</i>	I _{max}	40 kA
Connection mode(s)		L/PE and N/PE
Protection mode(s)		Common mode
Residual voltage at 5 kA <i>@ 5 kA (8/20 μs)</i>	Up-5kA	1.3 kV
Protection level N/PE <i>@ In (8/20 μs)</i>	Up N/PE	1.8 kV
Protection level L/PE <i>@ In (8/20 μs)</i>	Up L/PE	1.8 kV
Admissible short-circuit current	I _{sc cr}	25 000 A

Mechanical Characteristics

SPD configuration		3-phase+Neutral
Connection to Network		By screw terminals: 2.5-25mm ² / by bus
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	T _u	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Disconnection indicator		1 mechanical indicator by pole
Spare module(s)		DSM40-400
Remote signaling of disconnection		Output on changeover contact

Disconnectors

Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Back-up protection device		Fuses type gG - 50 A

Standards

Certification		UL / TÜV
Environmental standards		EU RoHS

Part number

461422

