




CITEL

Type 2 AC surge protector - Single-phase

DAC50-11-320



- › Type 2 AC multipolar surge protector
- › In: 20 kA
- › Imax: 50 kA
- › Pluggable module for each phase
- › Remote signaling option
- › EN 61643-11, IEC 61643-11 certified

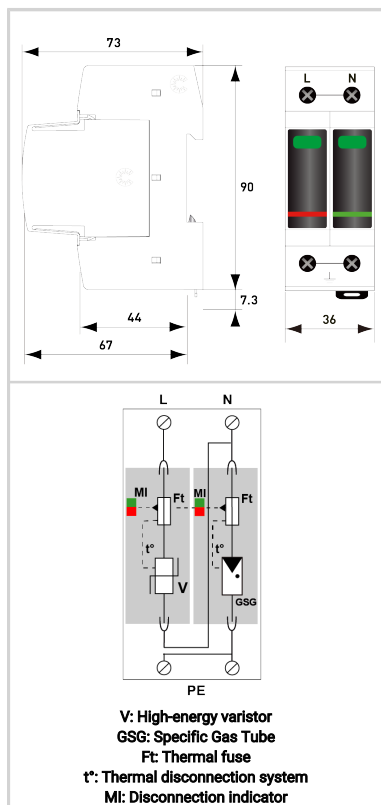

Electrical Characteristics		
SPD type	IEC	2
Network		230/400V
AC system		TT-TN
Max. AC operating voltage	Uc	320 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	440 Vac disconnection
Temporary Over Voltage N/PE (TOV HT) Without disconnection or with safety disconnection	UT	1200 V/300A/200 ms withstand
Residual Current Leakage current to Ground	Ipe	None
Follow current	If	None
Nominal discharge current 15 x 8/20 μ s impulses	In	20 kA
Max. discharge current max. withstand @ 8/20 μ s by pole	Imax	50 kA
Total Maximum discharge current max. total withstand @ 8/20 μ s	Imax Total	50 kA
Protection mode(s)		L/N and N/PE
Protection level @ In (8/20 μ s) and @ 6 kV (1,2/50 μ s)	Up L/N	1.5 kV
Protection level N/PE @ In (8/20 μ s) and @ 6 kV (1,2/50 μ s)	Up N/PE	1.5 kV
Residual voltage L/N at 5 kA @ 5 kA (8/20 μ s)	Up-5kA	1.2 kV
Protection level N/PE at 5 kA @ 5 kA (8/20 μ s)	Up-5kA	1.2 kV
Admissible short-circuit current	Iscor	50 000 A
UL Electrical Characteristics		
Maximum Continuous Operating Voltage(L-L/L-N)	MCOV	320 V
Maximum Continuous Operating Voltage(L-G/N-G)	MCOV	255 V
Maximum Limiting Voltage(L-L/L-N)	MLV	2160 V
Maximum Limiting Voltage(L-G/N-G)	MLV	2470 V / 1510 V
Mechanical Characteristics		
Technology		MOV+GDT
SPD configuration		Single phase
Connection to Network		By screw terminals: 2.5-25mm ² (35mm ² rigid)
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Ingress Protection rating		IP20 (NEMA 2)
Failsafe mode		Disconnection from AC network
Disconnection indicator		1 mechanical indicator by pole - Red/Green
Spare module(s)		MDAC50-320+MDAC50G-320
Remote signaling of disconnection		option DAC50S-11-320 : output on changeover contact
Dimensions		See diagram - 2TE (EN43880)
Weight		0.186 kg
Disconnectors		
Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Back-up protection device		50 A min. - 125 A max. - Fuses Type gG
Standards		



CITEL

Type 2 AC surge protector - Single-phase

DAC50-11-320

Standards compliance	IEC 61643-11 / EN 61643-11
Certification	OVE
Part number	
821110332	

