




# CITEL

## 1-pair DIN rail plug-in Data surge protector

### DLA-06DBC/R

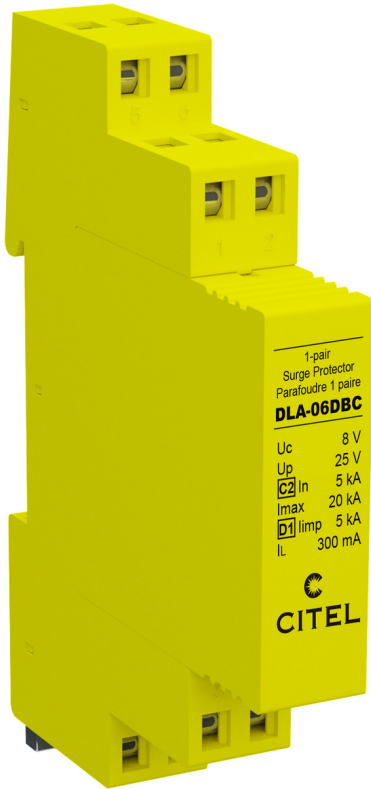

- › Discover our latest innovation : the [DLA-06D3/R](#)
- › High current data transmission
- › Common mode and differential mode protection
- › Data lines, including those isolated from Earth
- › Compact DIN rail enclosure, high density protection
- › Protection of shield wire
- › Plug-out with line cut-off
- › Location and test categories: D1, C2, C3
- › IEC 61643-21 compliance



Electrical Characteristics		
Network		MIC/T2, 10BaseTRS485
Nominal line voltage	Un	6 V
Max. DC operating voltage	Uc	8 Vdc
Max. frequency	f max.	20 MHz
Insertion loss		< 1 dB
Max. load current @25°C	IL	300 mA
Max. discharge current <i>max. withstand @ 8/20 μs by pole</i>	I <sub>max</sub>	20 kA
Nominal discharge current <i>C2 Category</i>	I <sub>n</sub>	5 kA
Protection Level <i>C3 (10/1000μs), 300 applications@10 A, Y-Y (Line/Line)</i>	Up	25 V
Protection Level <i>C3 (10/1000μs), 300 applications@10 A, Y-C (Line/Earth)</i>	Up	20 V
Max. capacitance	C	< 50 pF
Impulse current <i>2 x 10/350μs Test - D1 Category</i>	I <sub>imp</sub>	5 kA
Line resistance (± 10%)		4.7 Ohm
Mechanical Characteristics		
Technology		GDT+TVS diode
SPD configuration		1-pair+shielded
Connection to Network		Spring terminal: cross section 0.5-2.5mm <sup>2</sup>
Format		Din Rail Base-Plug-in Module
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating and storage temperature		-40/+85°C
Protection rating		IP20
Failsafe mode		Short-circuit
Disconnection indicator		Transmission interrupt - default mode 2
Spare module(s)		DLAM-06DBC
Dimensions		See diagram
Standards		
Standards compliance		IEC 61643-21 / EN 61643-21
Part number		
6401214		

