




# CITEL

## Type 1+2 AC surge protector - 3-phase

### DUT250VG-300/TNC



- ▶ Type 1+2+3, 3-phase surge protector
- ▶ Common and differential mode
- ▶ Very compact monobloc enclosure
- ▶ Iimp by pole/total : 25kA
- ▶ Internal disconnection, status indicator
- ▶ Optimized to TOV
- ▶ EN 61643-11, IEC 61643-11 and UL1449 ed.5 compliance

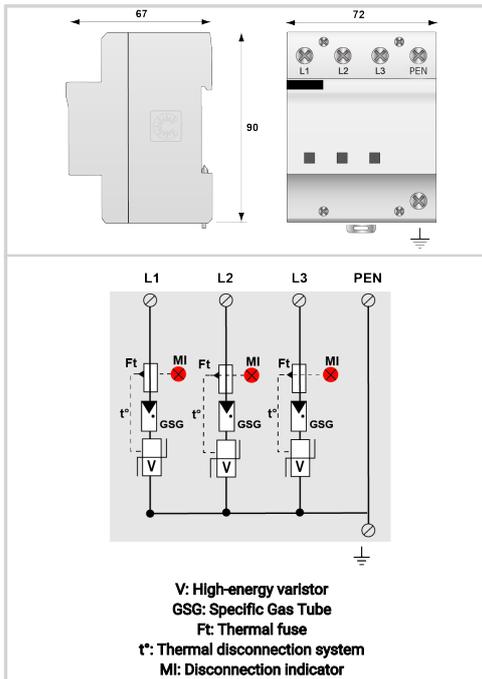

Electrical Characteristics		
SPD type	IEC	1+2+3
Network		230/400 V 3-phase
AC system		TNC
Nominal line voltage	Un	230/400 Vac
Max. AC operating voltage	Uc	255 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	440 Vac withstand
Residual Current Leakage current to Ground	Ipe	None
Follow current	If	None
Nominal discharge current 15 x 8/20 μs impulses	In	40 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I <sub>max</sub>	100 kA
Impulse current by pole max. withstand 10/350 μs by pole	I <sub>imp</sub>	25 kA
Total lightning current max. total withstand @ 10/350 μs	I <sub>total</sub>	75 kA
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50 μs - 8/20 μs	Uoc	6 kV
Withstand on overvoltages IEEE C62.41.1		20 kV
Specific energy by pole max. withstand 10/350 μs	W/R	156 kJ/ohm
Connection mode(s)		L/PEN
Protection mode(s)		Common mode
Protection level L/PE @ In (8/20 μs)	Up L/PE	1.5 kV
Admissible short-circuit current	I <sub>sc</sub>	50 000 A
Mechanical Characteristics		
Technology		VG Technology (MOV+GSG)
SPD configuration		3-phase
Connection to Network		By screw terminals: 6-35mm <sup>2</sup> / by bus
Format		Multipolar modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Disconnection indicator		3 mechanical indicators by pole
Remote signaling of disconnection		none
Dimensions		See diagram
Weight		0.61 kg
Disconnectors		
Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Back-up protection device		Fuse assembly: SFD1-25-30S / or Fuses Type gG 315 A
Standards		
Standards compliance		IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification		
Part number		
<b>3588</b>		

