


*Permanent & temporary overvoltages protector (POP)*

# DVM-120-16A

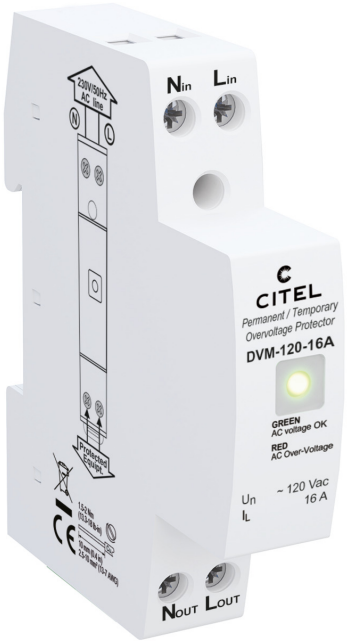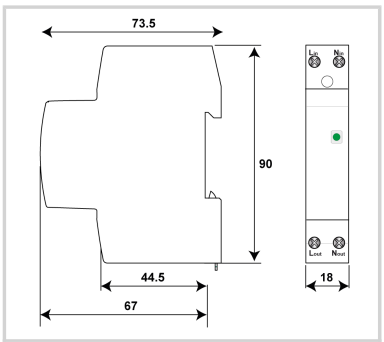


- Protection against temporary overvoltages
- Automatic delayed switch-off and switch-on again
- Status display (green, red)
- Easy installation on top-hat rail
- Complies with IEC 63052 standard

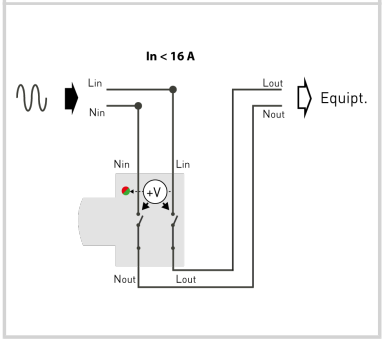


| Electrical Characteristics | | |
|---|---|---|
| Network | | 120/208 V |
| **Mechanical Characteristics** | | |
| Minimum disconnection during on AC voltage | | 3s @ 143 Vac / 1s @ 157 Vac / 0.25s @ 183 Vac / 0.07 @ 209 Vac |
| Connection to Network | | By screw terminals: 1.5-10mm² |
| Housing material | | Thermoplastic UL94 V-0 |
| Operating temperature | Tu | -40/+85°C |
| Protection rating | | IP20 |
| Disconnection indicator | | 1 mechanical indicator - Red/Green |
| Dimensions | | See diagram |
| **Standards** | | |
| Standards compliance | | IEC 63052 |
| **Part number** | | |
| **358912** | | |