




# CITEL

## AC surge protector for LED Lighting system Class 1

### MLPC1-230L-V/2L



- Type 2 (or 3) surge protector for Class I LED Lighting
- AC surge protection for 2-Phase + Neutral network
- Compact dimensions
- Screw connection
- Max. discharge current 10 kA
- Certified IEC 61643-11

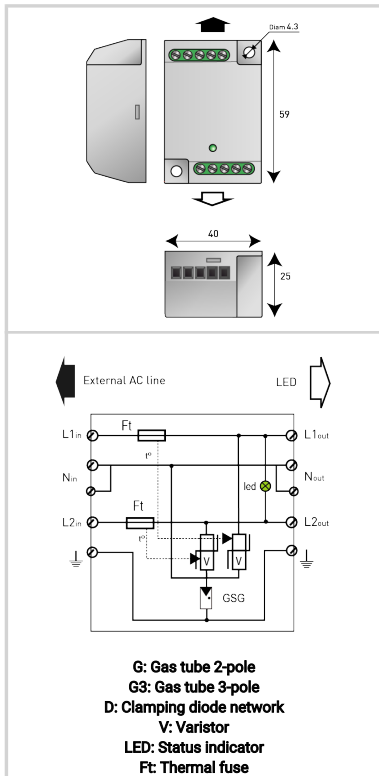

Electrical Characteristics		
SPD type	IEC	2+3
Network		2-phase + N 230 V
AC system		TT-TN
Max. AC operating voltage	Uc	320 Vac
Max. load current @25°C	IL	5 A
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	440 Vac disconnection
Residual Current	Ipe	None
Leakage current to Ground		
Nominal discharge current 15 x 8/20 $\mu$ s impulses	In	5 kA
Max. discharge current max. withstand @ 8/20 $\mu$ s by pole	Imax	10 kA
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50 $\mu$ s - 8/20 $\mu$ s	Uoc	10 kV / 5 kA
Protection mode(s)		L1/N, L2/N and N/PE
Protection level L/N @ In (8/20 $\mu$ s)	Up L/N	1.5 kV
Protection level N/PE @ In (8/20 $\mu$ s)	Up N/PE	1.5 kV
Admissible short-circuit current	Iscsr	10 000 A
Mechanical Characteristics		
Connection to Network		1 screw contact single side in/out - wire 2.5mm <sup>2</sup> max.
Mounting		On plate
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection, Green Led OFF and power cut off
Disconnection indicator		LED green OFF and AC network cut-off
Operating indicator		Green Led ON
Dimensions		See diagram
Weight		0.057 kg
Disconnectors		
Thermal disconnector		Internal
Standards		
Standards compliance		IEC 61643-11 / EN 61643-11
Certification		KEMA / ENEC05
Part number		
<b>831225</b>		

