




# CITEL

## Screw terminal for 'V' connection

### DDT16



- › 'V' connection screw terminal for SPD
- › Improved connection for better efficiency
- › 2 x 35 mm<sup>2</sup> wire connection
- › Adapted to DAC/DDC surge protectors

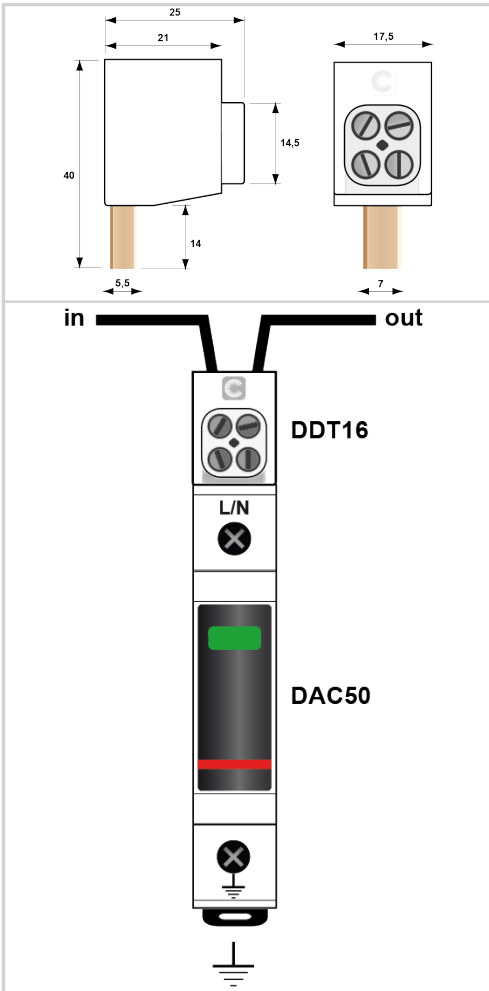

Electrical Characteristics		
Max. AC operating voltage	Uc	1000 Vac
Max. DC operating voltage	Uc	1500 Vdc
Max. load current @25°C	IL	100 A
Mechanical Characteristics		
Mounting	On DAC/DDC range terminal	
Housing material	Polycarbonate UL94 V-0	
Ingress Protection rating	IP00	
Dimensions	See diagram	
Contacts	Brass	
Mini-max. cross section	2.5 - 25 mm <sup>2</sup> (12-4 AWG), solid, stranded & flexible	
Weight	0.042 kg	
Standards		
Standards compliance	UL1059	
Part number		
400132		

